




6.50 m
[21' 3.91"]



300 kg
[661.39 lb]



MADE IN SPAIN

LIFTING TOWERS WITH 3 SAFETY SYSTEMS



Ref. **AL-KO CF901**

AUTO-BRAKE WINCH.
COMPLIES WITH CE MACHINERY DIRECTIVES.



AUTOMATIC SAFETY
BLOCKING SYSTEM (ASB)



INTERNAL PENDULUM
BRAKE SYSTEM (IPB)



MAST SECTION
UNBLOCKING SYSTEM (MSU)



MAST SEQUENCE
CONTROL SYSTEM (MSC)



MORE MAST OVERLAP.
PREVENT FISHING ROD EFFECT.







DGUV Regulation 17

MADE IN SPAIN



TECHNICAL SPECIFICATIONS		ULK 650
WORKING HEIGHT	FORKS UP	6,50 m / 21' 3.91"
	FORKS DOWN	6,00 m / 19' 8.22"
MAXIMUM LOAD		300 kg / 661.39 lb
NET WEIGHT		187 kg / 412.26 lb
FOLDED DIMENSIONS		540 x 760 x 1992 mm / 1' 9.26" x 2' 5.92" x 6' 6.42"
LOADING HEIGHT		30 cm / 11.91"
No OF SECTIONS		4
WIDTH OF PROFILE		181 mm / 7.13"
AUTO BRAKE WINCH		Ref. AL-KO CF901
MINIMUM LOAD WEIGHT		20 kg / 44.09 lb
MADE WITH		ALUMINIUM: EN-AW 6082 T6 - STEEL: S235 JRH
COLOUR		BLACK
COMPLIES WITH		2006/42/CE - DGUV Regulation 1, 17 & 18 - DGUV Rule 115-002

MADE IN SPAIN

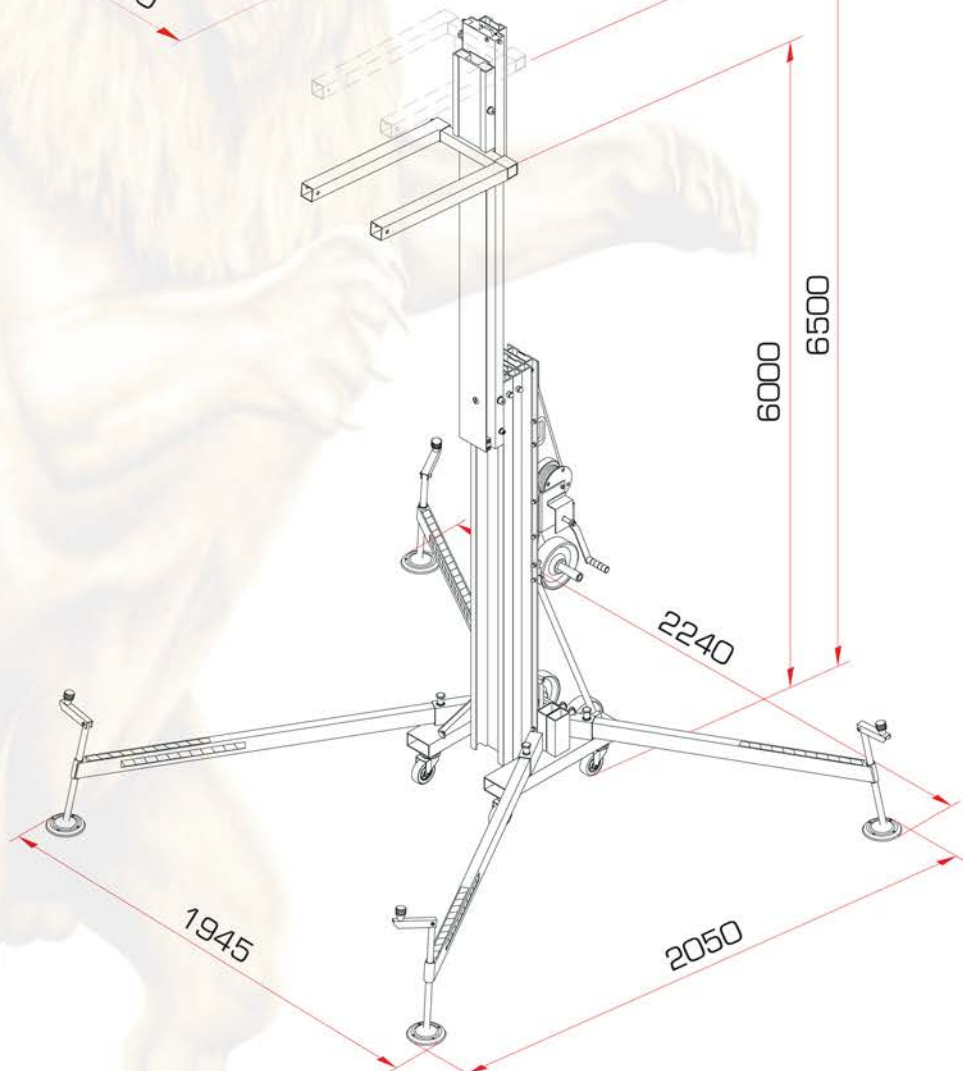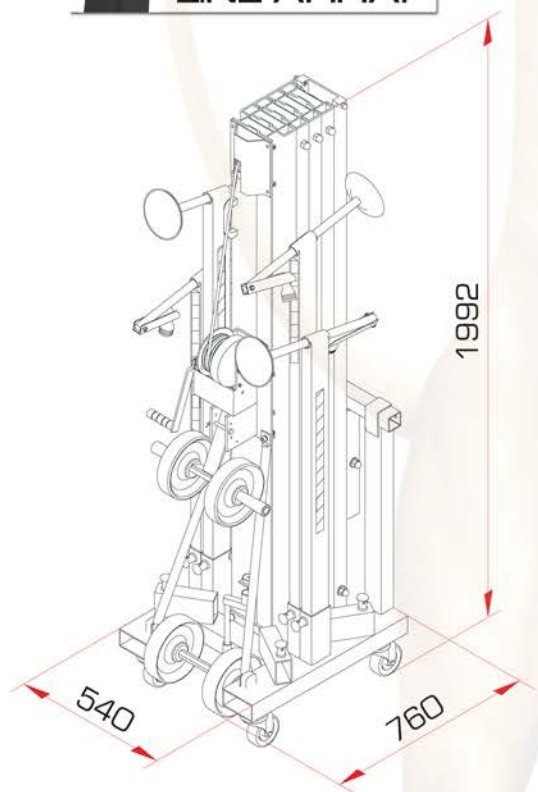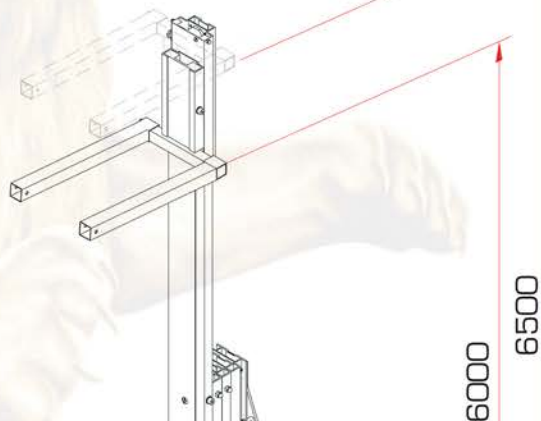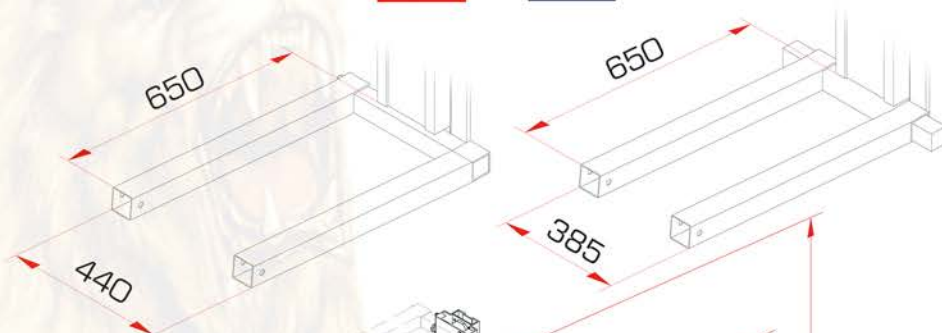

ADAPTORS FOR ULK TOWERS

ADAPTORS TO FLY LINE ARRAY SYSTEMS

SWIVEL ADAPTOR TO FIT TRUSSES TO ULK TOWERS



Ref. **ULK-A6**



Ref. **ULK-A10**

What makes our towers different?



Mast Section Unlocking System (MSU)




Automatic Safety Blocking System (ASB)



Auto-brake Winch.
Complies with CE Machinery Directives.



Internal Pendulum Brake System (IPB)

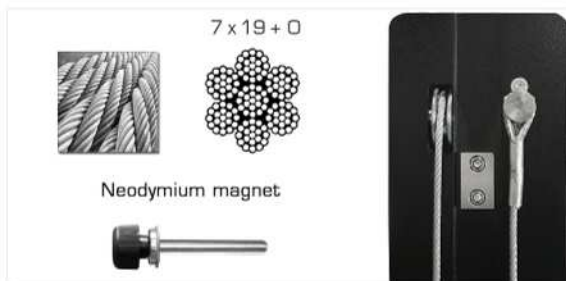

Reinforced Aluminium Sections (EN-AW 6082 T6). Galvanised steel wire rope. Stainless steel magnetic fastener bolts (Neodymium).



Cable resend system with steel pulleys.



4 heavy-duty wheels (Ø100mm) with aluminium core & steel fastening plates.



Fitted with 4 stabiliser braces for greater lift stability.



Leveller screw jacks with double thread for a quick adjustment & chrome foot plates with non-slip injection moulded rubber pads.



2 heavy-duty Ø200mm wheels for horizontal transportation & loading into vehicles.



U-shaped steel plate to reinforce the securing of the mast sections to the base. Integrated manual holder.



More mast overlap. Prevent fishing rod effect.



Fold-away handles with 2 heavy-duty Ø200mm wheels for horizontal transportation & loading into vehicles.



60x60 mm Reinforced forks. Maximum strength. Adjustable & detachable design. Fork carriage with two positions.